

-Adjustable Jacks(USA & EUROPE & ASIA)-

1. Screw Jack(with Base Plate)

2. Screw Jack(with Socket)

	1.30"x 24"		Dia	1.30"x 24"		
	33x600(L)			33x600(L)		
	5.51"x 5.51"x 0.23"		Plate Pipe	1.68"x 7.48"x 0.09"		
	140x140x5.8mm (t)			42.7x190x2.2mm (t)		
	11.02 (lbs)	5.00 (kg)	Weight	10.49 (lbs)	4.76 (kg)	
	45 (kN)	4.5 (ton)	Road	45 (kN)	4.5 (ton)	
	Round Bar & Zinc-Galvanized Vertical Frame Type (USA & EUROPE)					

3. Jack Base

4. U-Head Jack

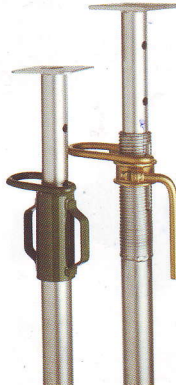
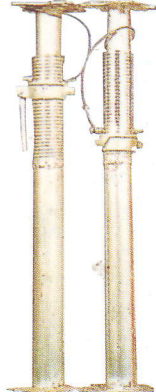
BJ-3460		1.34"x 24"x 0.16"		Dia	1.34"x 24"x 0.16"		BUJ-3460
34.0x600(L)x4.0mm(t)		34.0x600(L)x4.0mm(t)					
4.72"x 4.72"x 0.21"		Plate	5.91"x 3.35"x 1.97"x 0.21"				
120x120x5.4mm(t)			150x85x50x5.4mm(t)				
5.73(lbs)	2.60(kg)	Weight	6.40(lbs)	2.90(kg)			
44(kN)	4.4(ton)	Road	44(kN)	4.4(ton)			
Pipe & Zinc-Galvanized Vertical Frame & System Scaffolding Type (ASIA & JAPAN)							

5. Jack Base

6. U-Head Jack

BJ-4260		1.68"x 24"x 0.18"		Dia	1.68"x 24"x 0.18"		BUJ-4260
	42.7x600(L)x4.5mm(t)		42.7x600(L)x4.5mm(t)				
	5.12"x 5.12"x 0.23"		Plate	7.87"x 5.12"x 2.36"x 0.23"			
	130x130x5.8mm(t)			200x130x60x5.8mm(t)			
	7.87(lbs)	3.57(kg)	Weight	10.91(lbs)	4.95(kg)		
	160(kN)	16(ton)	Road	160(kN)	16(ton)		
	Pipe & Hot Dip-Galvanized System Support Type (ASIA & JAPAN)						
							

-Adjustable Props-

Post Shore	Min	Max	Weight	Model		Mini	Max	Weight	Pipe Support
	3'6"	6'0	24.2(lbs)	PS1	V1	5'11"	10'6"	24.3(lbs)	
	1.07(mt)	1,83(mt)	11.0(kg)			1.80(mt)	3.20(mt)	11.0(kg)	
	5'9"	10'3"	36.8(lbs)	PS2	V2	6'7"	11'2"	26.5(lbs)	
	1.75(mt)	3,12(mt)	16.7(kg)			2.00(mt)	3.40(mt)	12.0(kg)	
	6'6"	11'0"	40.0(lbs)	PS3	V3	7'10"	12'6"	28.7(lbs)	
	1.98(mt)	3,35(mt)	18.1(kg)			2.40(mt)	3.80(mt)	13.0(kg)	
	8'6"	13'0	46.0(lbs)	PS4	V4	8'6"	13'1"	30.9(lbs)	
	2.59(mt)	3.96(mt)	20.9(kg)			2.60(mt)	4.00(mt)	14.0(kg)	
	10'6"	15'6"	53.5(lbs)	PS5	V5	10'6"	19'8"	41.9(lbs)	
	3.20(mt)	4,72(mt)	24.3(kg)			3.20(mt)	6.00(mt)	19.0(kg)	
USA & EUROPE				Type		ASIA & JAPAN			