


EQUAL ANGLE BARS

Material Specification: EN 10025 S275JR/S355JR
ASTM A36
BS4360 Gr43A
JIS G3101 SS400

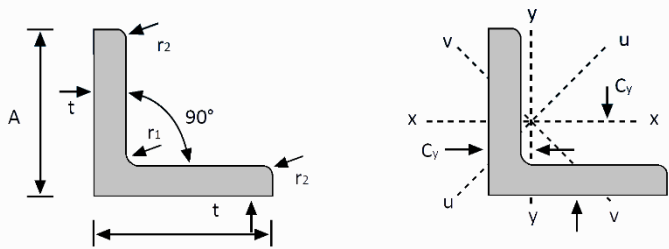


(Metric units)

Standard Sectional Dimension		Mass Per Metre	Radius		Sectional Area	Distance Centre Of Gravity	Second Moment of Area			Radius Of Gyration			Elastic Modulus
Section Size	Thickness		Root	Toe			Axis	Axis	Axis	Axis	Axis	Axis	Axis
A x A	t		r1	r2	A	Cx and Cy	x-x, y-y	u-u	v-v	x-x, y-y	u-u	v-v	x-x, y-y
mm	mm	Kg/m	mm	mm	cm ²	cm	cm ⁴	cm ⁴	cm ⁴	cm	cm	cm	cm ³
20 x 20	3	0.89	3.5	2.4	1.11	0.593	0.381	0.601	0.16	0.585	0.735	0.38	0.271
25 x 25	3	1.12	3.5	2.4	1.41	0.718	0.784	1.24	0.326	0.745	0.938	0.481	0.44
	4	1.45	3.5	2.4	1.84	0.758	1	1.58	0.422	0.737	0.926	0.479	0.574
	5	1.76	3.5	2.4	2.25	0.796	1.19	1.87	0.516	0.728	0.912	0.479	0.701
30 x 30	3	1.36	5	2.4	1.74	0.836	1.41	2.23	0.59	0.901	1.13	0.582	0.652
	4	1.76	5	2.4	2.27	0.879	1.81	2.86	0.758	0.893	1.12	0.578	0.853
	5	2.16	5	2.4	2.78	0.919	2.17	3.42	0.921	0.884	1.11	0.576	1.04
35 x 35	6	1.65	5	2.4	3.87	1.08	4.13	6.51	1.76	1.03	1.3	0.67	1.71
38 x 38	3	1.72	6	2.4	2.24	1.03	2.99	4.72	1.25	1.15	1.45	0.75	1.08
	4	2.36	6	2.4	2.93	1.07	3.85	6.1	1.61	1.15	1.44	0.74	1.41
	5	2.79	6	2.4	3.6	1.12	4.66	7.36	1.95	1.14	1.43	0.74	1.73
	6	3.33	6	2.4	4.25	1.15	5.4	8.51	2.29	1.13	1.41	0.73	2.04
40 x 40	3	1.83	6	2.4	2.36	1.08	3.51	5.55	1.47	1.22	1.53	0.79	1.2
	4	2.42	6	2.4	3.09	1.12	4.53	7.18	1.89	1.21	1.52	0.78	1.58
	5	2.95	6	2.4	3.8	1.17	5.48	8.68	2.29	1.2	1.51	0.78	1.94
	6	3.52	6	2.4	4.49	1.2	6.37	10.1	2.69	1.19	1.5	0.77	2.28
45 x 45	4	2.74	7	2.4	3.52	1.24	6.59	10.4	2.75	1.37	1.72	0.88	2.02
	5	3.38	7	2.4	4.33	1.29	7.99	12.6	3.34	1.36	1.71	0.88	2.49
	6	3.96	7	2.4	5.12	1.33	9.31	14.7	3.9	1.35	1.69	0.87	2.93
50 x 50	3	2.33	7	2.4	2.99	1.32	7.06	11.1	2.97	1.54	1.93	0.997	1.92
	4	3.06	7	2.4	3.92	1.37	9.17	14.5	3.82	1.53	1.92	0.987	2.52
	5	3.77	7	2.4	4.83	1.41	11.2	17.7	4.64	1.52	1.91	0.98	3.11
	6	4.43	7	2.4	5.72	1.45	13	20.6	5.43	1.51	1.9	0.974	3.67
	8	5.78	7	2.4	7.44	1.53	16.5	25.9	6.97	1.49	1.87	0.968	4.74
60 x 60	5	4.55	8	2.4	5.86	1.65	19.8	31.4	8.24	1.84	2.31	1.19	4.56
	6	5.42	8	2.4	6.95	1.7	23.2	36.8	9.65	1.83	2.3	1.18	5.4
63 x 63	5	4.75	8	2.4	6.16	1.73	23.1	36.6	9.58	1.93	2.44	1.25	5.05
	6	5.71	8	2.4	7.31	1.77	27.1	42.9	11.2	1.92	2.42	1.24	5.98

EQUAL ANGLE BARS

Material Specification: EN 10025 S275JR/S355JR
ASTM A36
BS4360 Gr43A
JIS G3101 SS400

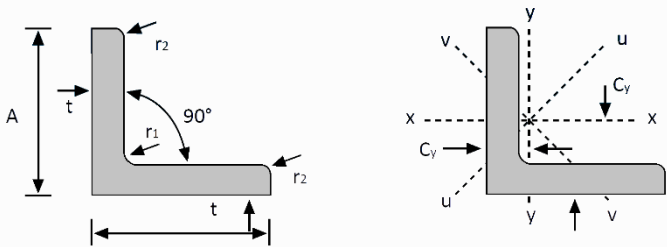


(Metric units)

Standard Sectional Dimension		Mass Per Metre	Radius		Sectional Area	Distance Centre Of Gravity	Second Moment of Area			Radius Of Gyration			Elastic Modulus
Section Size	Thickness		Root	Toe			Axis	Axis	Axis	Axis	Axis	Axis	Axis
A x A	t		r1	r2	A	Cx and Cy	x-x, y-y	u-u	v-v	x-x, y-y	u-u	v-v	x-x, y-y
mm	mm	Kg/m	mm	mm	cm ²	cm	cm ⁴	cm ⁴	cm ⁴	cm	cm	cm	cm ³
65 x 65	5	5	9	2.4	6.4	1.77	25.5	40.3	10.6	2	2.51	1.29	5.39
	6	5.91	9	2.4	7.59	1.82	29.9	47.4	12.4	1.98	2.5	1.28	6.38
	8	7.66	9	2.4	9.91	1.9	38.2	60.4	15.9	1.96	2.47	1.27	8.29
	9	8.55	9	2.4	11	1.94	42	66.4	17.6	1.95	2.45	1.26	9.21
70 x 70	6	6.38	9	2.4	8.19	1.94	37.7	59.8	15.7	2.15	2.7	1.38	7.48
	7	7.38	9	2.4	9.46	1.98	43.1	68.3	17.9	2.13	2.69	1.38	8.59
	8	8.43	9	2.4	10.71	2.02	48.3	76.5	20.1	2.12	2.67	1.37	9.7
75 x 75	5	5.76	10	4.8	7.37	2	38.7	61.2	16.2	2.29	2.88	1.48	7.02
	6	6.85	10	4.8	8.76	2.04	45.7	72.4	19	2.28	2.88	1.47	8.38
	8	9.03	10	4.8	11.5	2.13	59	93.5	24.5	2.27	2.85	1.46	11
	9	9.96	10	4.8	12.8	2.17	65.3	103	27.2	2.26	2.84	1.46	12.3
	10	10.99	10	4.8	14.1	2.21	71.3	113	29.8	2.25	2.83	1.45	13.5
	12	13	10	4.8	16.7	2.29	82.7	130	35	2.23	2.8	1.45	15.9
80 x 80	6	7.32	10	4.8	9.36	2.17	56	88.7	23.2	2.45	3.08	1.58	9.6
	8	9.66	10	4.8	12.3	2.26	72.4	115	30	2.43	3.06	1.56	12.6
	10	11.8	10	4.8	15.1	2.34	87.7	139	36.5	2.41	3.03	1.55	15.5
90 x 90	6	8.28	11	4.8	10.6	2.41	81	128	33.7	2.76	3.48	1.78	12.3
	7	9.59	11	4.8	12.3	2.46	93.2	148	38.7	2.76	3.47	1.77	14.3
	8	10.9	11	4.8	13.9	2.5	105	167	43.5	2.75	3.46	1.77	16.2
	9	12.2	11	4.8	15.6	2.54	117	185	48.2	2.74	3.45	1.76	18
	10	13.3	11	4.8	17.2	2.58	128	202	52.9	2.73	3.43	1.76	19.9
	12	15.9	11	4.8	20.3	2.66	149	235	62.1	2.7	3.4	1.75	23.5
	13	17	11	4.8	21.9	2.7	159	251	66.6	2.69	3.39	1.74	25.2
100 x 100	6	9.2	12	4.8	11.9	2.65	113	178	47	3.08	3.88	1.99	15.3
	7	10.7	12	4.8	13.7	2.7	130	206	53.9	3.08	3.87	1.98	17.8
	8	12.2	12	4.8	15.6	2.75	146	232	60.6	3.07	3.86	1.97	20.2
	10	15	12	4.8	19.2	2.83	178	283	73.8	3.05	3.84	1.96	24.8
	12	17.8	12	4.8	22.8	2.91	208	330	86.5	3.02	3.81	1.95	29.4
	13	19.1	12	4.8	24.5	2.95	222	352	92.8	3.01	3.79	1.95	31.5
	15	21.9	12	4.8	28	3.02	250	395	105	2.99	3.76	1.94	35.8

EQUAL ANGLE BARS

Material Specification: EN 10025 S275JR/S355JR
ASTM A36
BS4360 Gr43A
JIS G3101 SS400

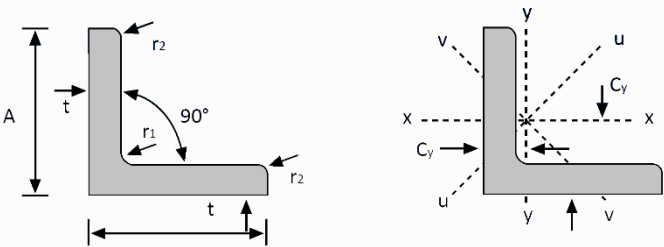


(Metric units)

Standard Sectional Dimension		Mass Per Metre	Radius		Sectional Area	Distance Centre Of Gravity	Second Moment of Area			Radius Of Gyration			Elastic Modulus
Section Size	Thickness		Root	Toe			Axis	Axis	Axis	Axis	Axis	Axis	Axis
A x A	t		r1	r2	A	Cx and Cy	x-x, y-y	u-u	v-v	x-x, y-y	u-u	v-v	x-x, y-y
mm	mm	Kg/m	mm	mm	cm²	cm	cm⁴	cm⁴	cm⁴	cm	cm	cm	cm³
120 x 120	8	14.7	13	4.8	18.8	3.24	259	411	107	3.71	4.67	2.38	29.5
	10	18.2	13	4.8	23.3	3.32	316	502	130	3.69	4.64	2.37	36.4
	12	21.6	13	4.8	27.6	3.41	371	588	153	3.66	4.62	2.36	43.1
	15	26.6	13	4.8	34	3.52	448	710	186	3.63	4.57	2.34	52.8
125 x 125	8	14.9	14	4.8	19.7	3.36	294	466	122	3.87	4.87	2.49	32.2
	10	19.09	14	4.8	24.3	3.44	360	570	149	3.84	4.84	2.47	39.7
	12	22.67	14	4.8	28.9	3.53	422	669	174	3.82	4.81	2.46	47
130 x 130	8	15.9	14	4.8	20.5	3.48	332	527	138	4.03	5.07	2.59	34.9
	9	17.9	14	4.8	22.9	3.53	370	586	153	4.02	5.06	2.58	39
	10	19.7	14	4.8	25.3	3.57	406	645	168	4.01	5.05	2.57	43.1
	12	23.5	14	4.8	30.1	3.65	477	758	197	3.98	5.02	2.56	51.1
	15	28.8	14	4.8	37.1	3.77	578	916	240	3.95	4.97	2.54	62.6
	16	30.7	14	4.8	39.4	3.81	610	966	253	3.94	4.95	2.54	66.3
150 x 150	8	18	16	4.8	23.8	3.97	518	820	215	4.66	5.87	3.01	46.9
	10	23	16	4.8	29.5	4.06	635	1008	263	4.64	5.85	2.99	58
	12	27.3	16	4.8	35	4.14	748	1187	309	4.62	5.82	2.97	68.9
	15	33.8	16	4.8	43.2	4.26	909	1442	375	4.59	5.78	2.95	84.6
	16	35.7	16	4.8	45.9	4.3	960	1523	397	4.57	5.76	2.94	89.8
	18	40.1	16	4.8	51.2	4.38	1060	1680	440	4.55	5.73	2.93	99.8
	19	41.9	16	4.8	53.8	4.42	1109	1756	462	4.54	5.71	2.93	105
175 x 175	12	31.8	16	4.8	41	4.77	1208	1920	497	5.43	6.84	3.48	94.9
	15	39.4	16	4.8	50.7	4.89	1474	2342	606	5.39	6.8	3.46	117

EQUAL ANGLE BARS

Material Specification: EN 10025 S275JR/S355JR
ASTM A36
BS4360 Gr43A
JIS G3101 SS400

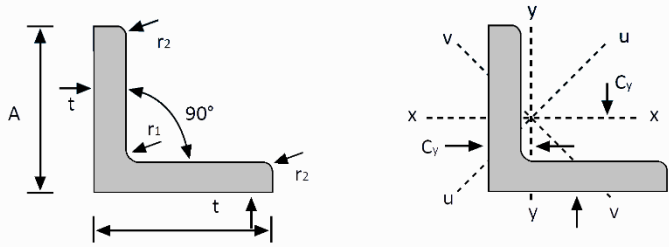

(Metric units)

Standard Sectional Dimension		Mass Per Metre	Radius		Sectional Area	Distance Centre Of Gravity	Second Moment of Area			Radius Of Gyration			Elastic Modulus
Section Size	Thickness		Root	Toe			Axis	Axis	Axis	Axis	Axis	Axis	Axis
A x A	t		r1	r2	A	Cx and Cy	x-x, y-y	u-u	v-v	x-x, y-y	u-u	v-v	x-x, y-y
mm	mm	Kg/m	mm	mm	cm²	cm	cm⁴	cm⁴	cm⁴	cm	cm	cm	cm³
200 x 200	12	36.55	18	4.8	47.2	5.38	1829	2906	753	6.23	7.85	4	125
	13	39.49	18	4.8	50.9	5.42	1967	3126	809	6.22	7.84	3.99	135
	15	45.3	18	4.8	58.3	5.5	2237	3555	919	6.19	7.81	3.97	154
	16	48.5	18	4.8	62	5.54	2369	3765	973	6.18	7.79	3.96	164
	18	54.2	18	4.8	69.4	5.62	2627	4174	1080	6.15	7.76	3.95	183
	20	59.9	18	4.8	76.6	5.7	2877	4569	1185	6.13	7.72	3.93	201
	24	71.1	18	4.8	90.8	5.85	3357	5322	1391	6.08	7.65	3.91	237
	25	73.6	18	4.8	94.3	5.89	3472	5502	1442	6.07	7.64	3.91	246
	26	76.8	18	4.8	97.8	5.93	3586	5680	1492	6.05	7.62	3.91	255
250 x 250	25	93.7	20	4.8	120	7.14	7030	11170	2891	7.67	9.67	4.92	394
	28	104	20	4.8	133	7.25	7741	12290	3195	7.63	9.61	4.9	436
	32	118	20	4.8	151	7.4	8650	13710	3593	7.58	9.54	4.89	491
	35	128	20	4.8	164	7.51	9305	14720	3887	7.54	9.49	4.88	532
300 x 300	35	155	24	18	197	8.71	16300	25900	6690	9.09	11.5	5.82	766
350 x 350	35	182	24	18	232	9.96	26600	42300	10800	10.7	13.5	6.83	1060